

 **NEW WORK FLOOR PLAN - MECHANICAL PIPING**  
SCALE: 3/16" = 1'-0"



**ASBESTOS AND LEAD PAINT NOTE**

AN ASBESTOS INSPECTION WAS PERFORMED AND ASBESTOS CONTAINING MATERIALS WERE FOUND GENERALLY IN THE AREAS INDICATED IN THE ASBESTOS SURVEY/INSPECTION REPORT WHICH IS AVAILABLE TO THE CONTRACTOR(S) FOR HIS INFORMATION. ASBESTOS CONTAINING MATERIALS HAVE BEEN REMOVED UNDER A SEPARATE CONTRACT.

A LEAD-BASED PAINT INSPECTION WAS PERFORMED AND LEAD-BASED PAINT WAS FOUND IN THE AREAS INDICATED. THE CONTRACTOR SHALL BE RESPONSIBLE WITH ALL REQUIREMENTS OF THE VIRGINIA OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION REGULATIONS LEAD-BASED PAINT PROTECTION OF WORKERS.

- NOTES THIS SHEET**
- 1 PROVIDE CWS/CWR AND HWS/HWR PIPING, INSULATION, HANGERS, AND SUPPORTS COMPLETE.
  - 2 PROVIDE DDC TEMPERATURE SENSOR AND CONTROL WIRING COMPLETE. MOUNT APPROX. 48" AFF.
  - 3 SEE SHUTOFF VAV BOX DETAIL FOR PIPING CONNECTION.
  - 4 BALANCE TO GPM INDICATED ON VAV SCHEDULE.
  - 5 PROVIDE CWS/CWR PIPING INSULATION, HANGERS & SUPPORTS COMPLETE.
  - 6 PROVIDE WALL MOUNTED THERMOSTAT AND CONTROL WIRING COMPLETE. MOUNT APPROX. 48" AFF.
  - 7 PAINT UTILITIES IN CORRIDOR MATTE BLACK.

SECTION 5 ROOM SCHEDULE	
150	GENERAL CLASSROOM
151	NURSING LAB
152	NURSING STORAGE
153	NURSING CLASSROOM/LAB
156	CORRIDOR
158	CHEM/PHYSICS LAB
159	BIOLOGY LAB 1
160	BIOLOGY PREP
161	BIOLOGY LAB 2

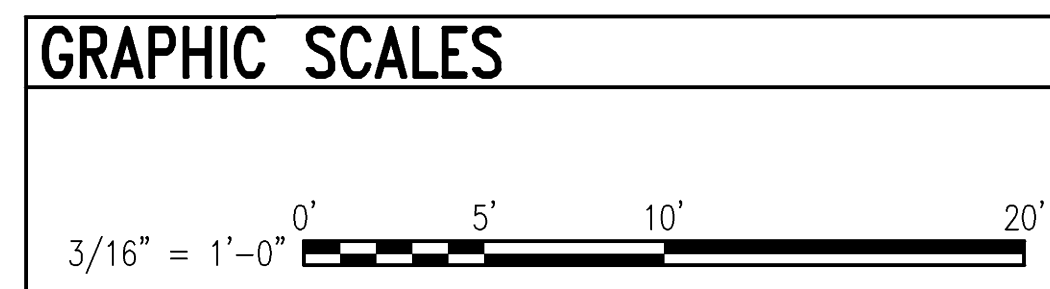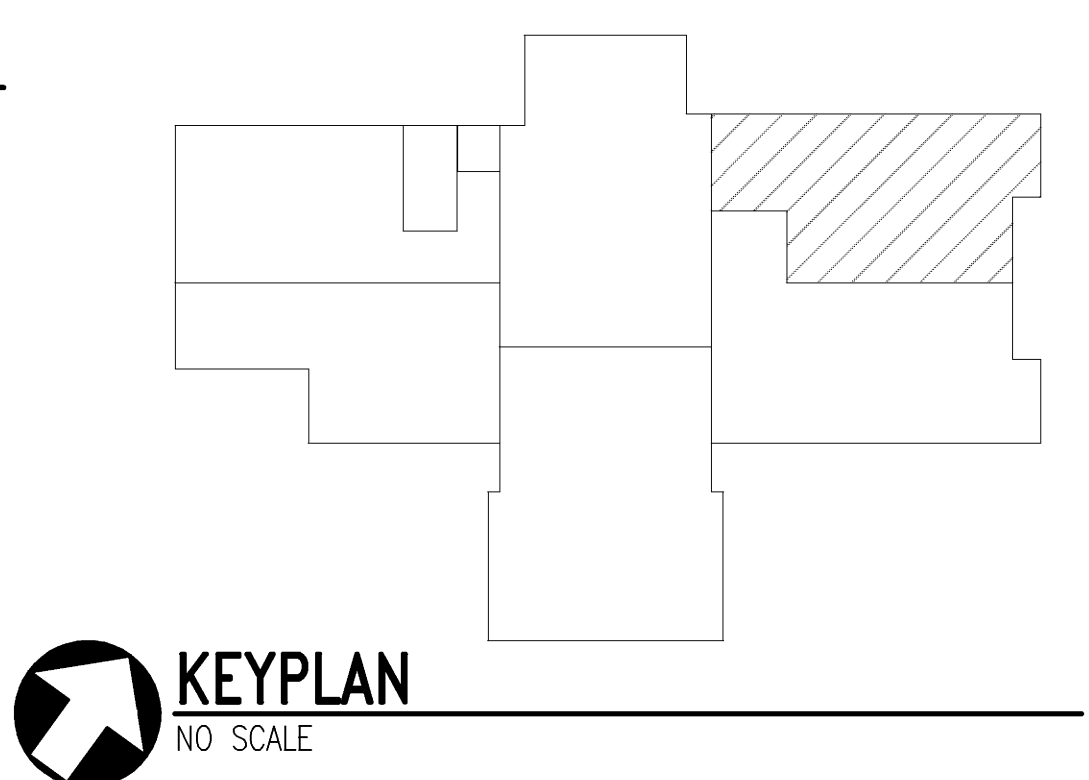


**nbij** ARCHITECTURE  
A Professional Limited Company  
GROVE PARK SQUARE  
11537-B NUCKOLS ROAD  
Richmond, Virginia 23059  
P: (804) 273-9611 Fax: (804) 273-9843

**RAPPAHANNOCK  
COMMUNITY COLLEGE**  
CAMPUS RENOVATIONS  
WARSAW + GLENN'S, VIRGINIA  
PC: 260-17712

**GLENN'S CAMPUSNEW WORK  
FLOOR PLAN - MECHANICAL PIPING**

Date: JANUARY 13, 2010

REVISIONS	
NO.	DATE

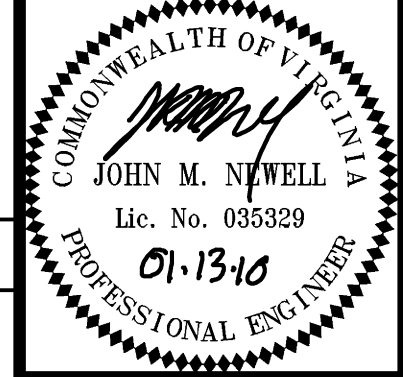

Sheet  
**M2.5G**  
File Number  
XX